

# How to update existing print layout templates when label printer label size changes


Created date	Updated date	Affects version	Fix version
19 Mar 2021	19 Mar 2021	Mobile Diagnostics and Erasure - All versions	N/A

## Description


These instructions will provide the necessary steps to update an existing printer layout when the labels used in a label printer attached to BMDE are changed.

## Step by step instructions

1. Login to BMDE workstation, and make sure printer labels are loaded, the printer is powered on, and connected via USB
2. Navigate to "Settings" and then "Printer"-tab
3. Under Page Size select the size of the labels in use in the label printer

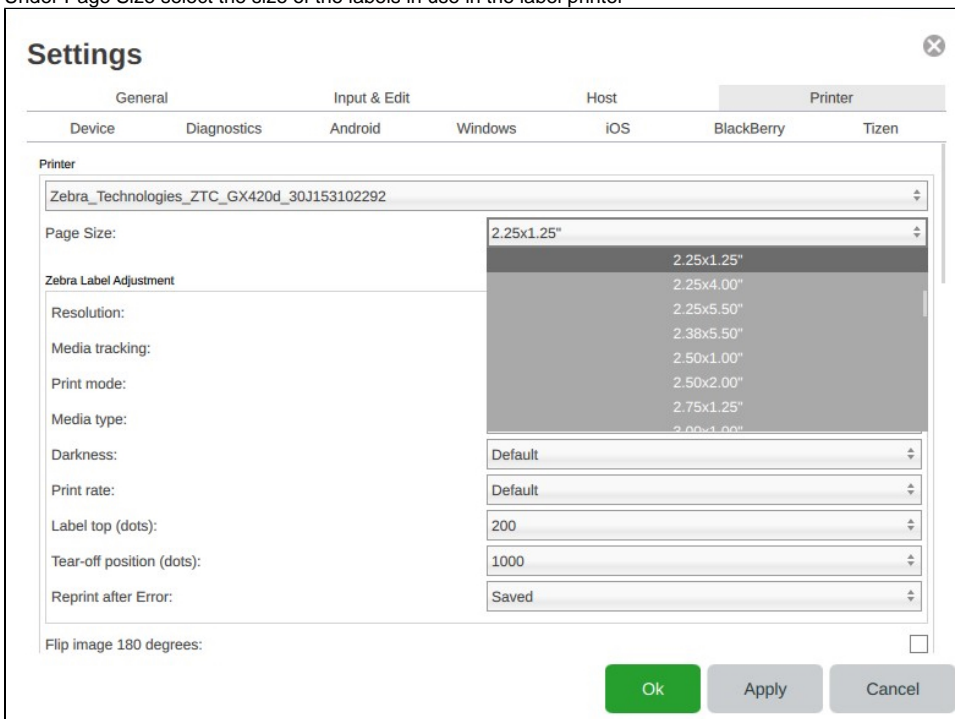


4. Scroll down to the bottom of the menu and select the print layout you would like to edit. Then select "Edit"

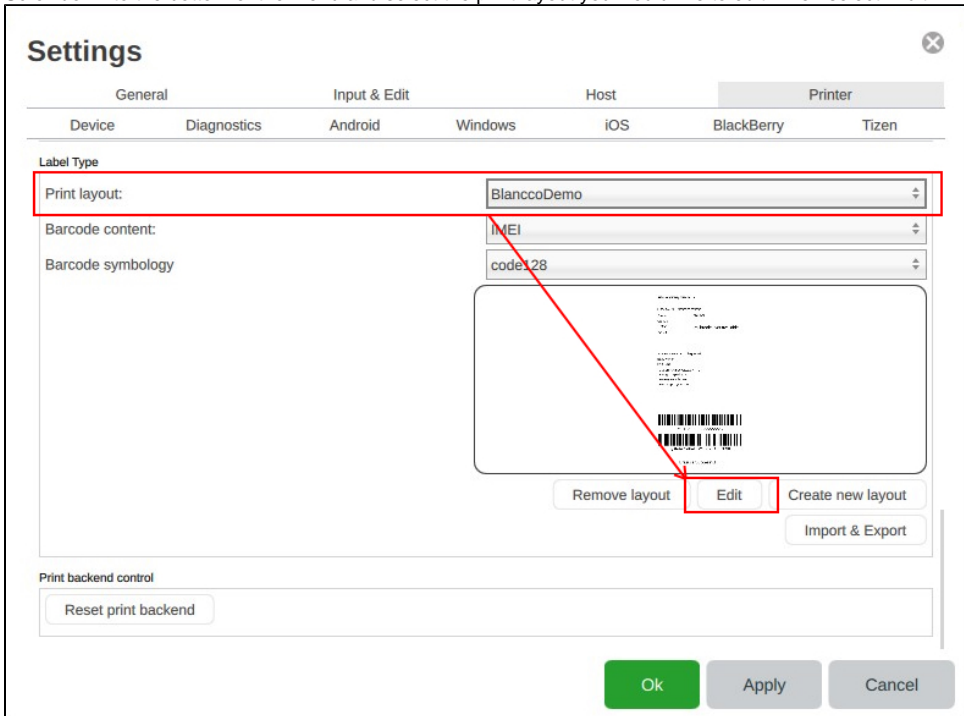

5. Right click on an empty area of the layout and select "Properties"



6. In the "Properties" menu select the paper size in mm that most closely matches the paper size in inches

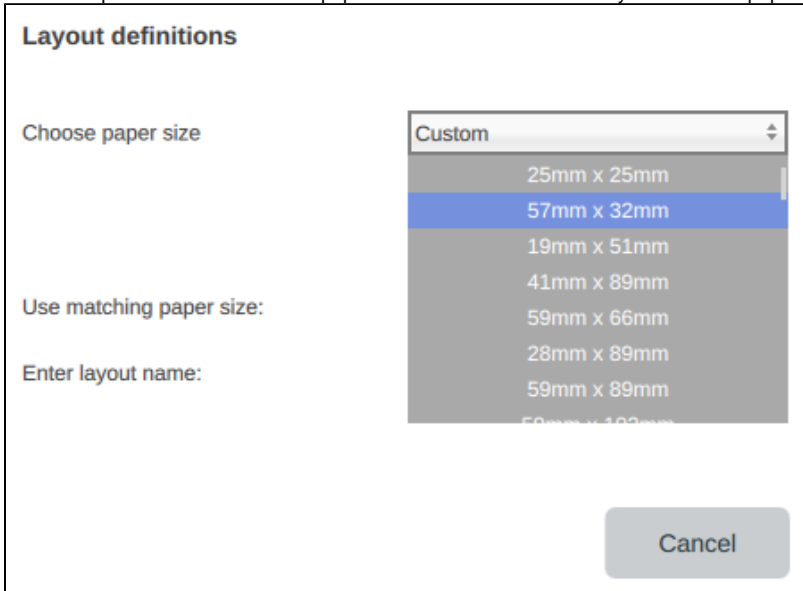

7. Make sure that "Use matching paper size" is not checked

**Layout definitions**

Choose paper size

Use matching paper size:

Enter layout name:

8. Adjust page layout so it is in the format that is correct for your use case

iPhone4(GSM) 8GB White

USB Port No.: 1-1.2

Model: ANumber: example\_amodelnumber

Carrier: Unknown

FMiP: Unknown Jailbreak: ROOTED

GSMA: Passed

Analyst Result: Not diagnosed

133px X 24px (1,200) 456px X 256px

Battery Info:

Batt S/N: AXXXXXYYYYYAAA

Test print Save & exit Cancel

To:

iPhone4(GSM) 8GB White

USB Port No.: 1-1.2 ANumber: example\_amodelnumber

Model: Carrier: Unknown

FMiP: Unknown Jailbreak: ROOTED

GSMA: Passed

Analyst Result: Not diagnosed

Battery Info:

Batt S/N: AXXXXXYYYYYAAA

397px X 26px (3,225) 456px X 256px

Test print Save & exit Cancel

9. When completed select "Test print" to verify the label prints correctly