

Blancco Eraser for Apple Devices Issue Report

Created date	Updated date	Affects version	Fix version
09 Mar 2023	22 Sep 2023	Eraser for Apple Devices	N/A


Description

If you are having a problem with Blancco Erasure for Apple Devices and the Blancco Knowledge Base or the User Manual do not seem to help, it is time to contact Blancco's Technical Support team. When contacting Technical Support, it is important to include the Blancco Erasure for Apple Devices issue report in the contact ticket. It is recommended that the issue report file should be zipped before adding it as an attachment.

Step by step instructions

To collect an issue report:

1. If possible, restart the BEAD machine and log in.
2. Connect the problematic device to the machine.
3. Attempt to replicate the issue, eg. start erasure process, start diagnostics process, etc..
4. Connect a USB memory stick to the computer if you want to save the issue report on it (otherwise the issue report will get saved in 'Documents').
5. Click the "Report Issue" button on the top right corner.

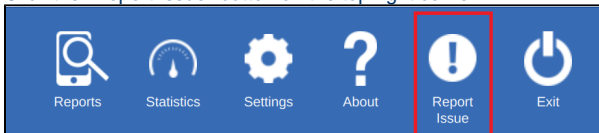

6. Select the location where the issue report should be saved (either external USB drive or 'Documents' -folder)

A dialog box titled 'Save Report Settings:'. It has two input fields on the left: 'Select media:' and 'Issue report name:'. To the right of 'Select media:' is a dropdown menu currently showing 'USB DRIVE'. Below this dropdown is a list of options: 'USB DRIVE' and 'Documents folder'.

7. In the next step, you can define the following
 - a. **Issue type** = Diagnostics, Erasure, Process, Other (**note!** if 'Other' is selected, then problem description should be filled with more detail on what the issue concerns).
 - b. **Occurs with** = Enter the device that the issue happens to.
 - c. **Also occurs with** = Define whether this happens to any other devices.
 - d. **Device state when the issue is noticed** = At what state is the device when issue is discovered.

A form titled 'Issue details:'. It contains four rows, each with a label and a dropdown menu:

- 'Issue type:' with 'Diagnostics' selected.
- 'Occur with:' with 'iPhone 12 mini GSM+CDMA 128GB Green; not activated, and disabled...' selected.
- 'Also occurs with:' with 'None' selected.
- 'Device state when the issue is noticed:' with 'Initializing' selected.

8. Enter a description of the problem for any additional information that might be useful in troubleshooting.

A form titled 'Problem Description:'. It features a large text area containing the text 'Diagnostics result are not submitting to BEAD station after completion'. At the bottom right of the form are two buttons: a green 'Save' button and a grey 'Cancel' button.

9. Click "Save" to save the report on the media of your choosing.

This issue report .xml -file can then be shared with Blancco's Technical Support for further troubleshooting along with a short description in the support ticket, such as:

- What is the exact problem?
- Was there some specific error message?
- What steps were taken before the problem occurred?
- Expected result and actual result.

